


Canberra double glass modules



Canberra double glass modules

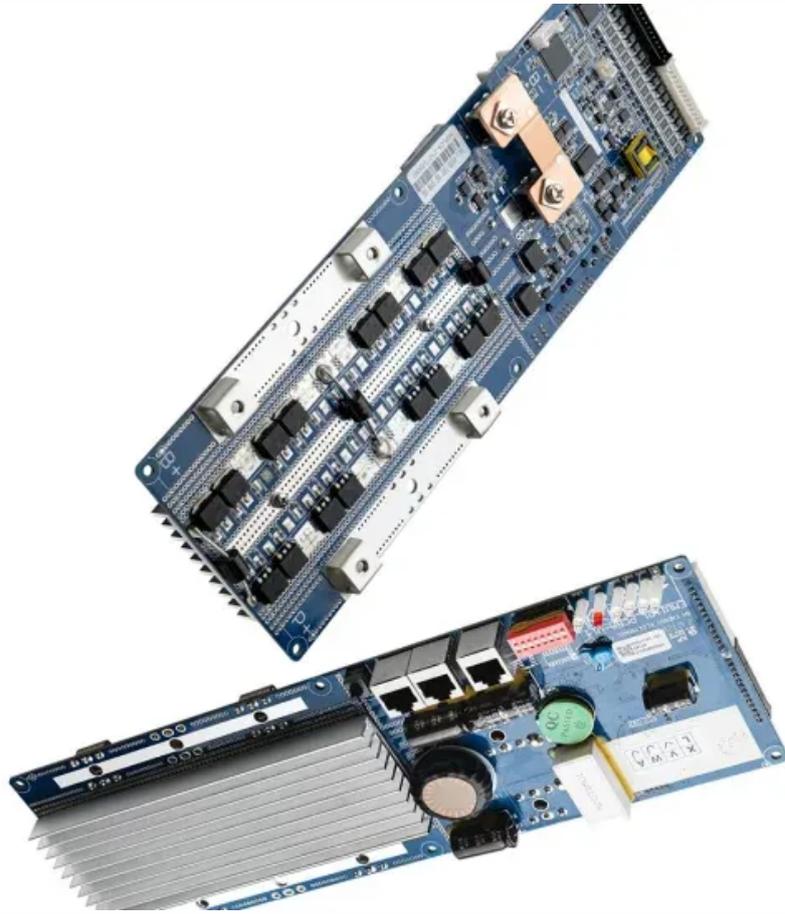

Canberra Double-Glass Photovoltaic Module Model Specifications A

The Canberra double-glass photovoltaic module series redefines reliability in renewable energy systems. Designed for commercial and utility-scale projects, these modules feature innovative ...

2025 Complete Guide to Glass-Glass Solar Panels: The Top Choice ...

Compared to traditional glass-backsheet modules, they offer greater durability and environmental resistance. The dual-glass structure provides enhanced protection for solar cells ...



Canberra double glass modules

Dual-glass type modules (also called double glass or glass-glass) are made up of two glass surfaces, on the front and on the rear with a thickness of 2.0 mm each.

Glass-Glass PV Modules

Double-glass modules boast increased reliability, especially for utility scale PV projects. These include better resistance to higher temperatures, humidity and UV conditions and have better mechanical

...



Performance and Longevity
 Performance and Longevity

Performance and Longevity
 Performance and Longevity



Glass-Glass Solar Panel Technology

Double Glass is especially important in photovoltaic facilities such as solar power plants and with the expected long service life of modules such as AKCOME, Jinery or Jollywood.

JA Solar Black Frame N-Type Double Glass Bifacial Modules


These panels are cyclone wind-rated. They are designed to withstand the extreme wind speeds, ensuring durability and reliability in severe weather conditions. Provides higher efficiency, better ...




Bifacial Double Glass Module

Two-sided double-glazed modules, symmetrical structural design, low risk of hidden cracks.

12.8V6Ah





Nominal voltage (V):12.8
 Nominal capacity (ah):6
 Rated energy (WH):76.8
 Maximum charging voltage (V):14.6
 Maximum charging current (a):6
 Floating charge voltage (V):13.6-13.8
 Maximum continuous discharge current (a):10
 Maximum peak discharge current @10 seconds (a):20
 Maximum load power (W):100
 Discharge cut-off voltage (V):10.8
 Charging temperature (°C):0-+50
 Discharge temperature (°C): -20-+60
 Working humidity: <95% R.H (non condensing)
 Number of cycles (25 °C, 0.5C, 100%doD): >2000
 Cell combination mode: 32700-4s1p
 Terminal specification: T2 (6.3mm)
 Protection grade: IP65
 Overall dimension (mm):50*70*107mm
 Reference weight (kg):0.7
 Certification: un38.3/msds

Bifacial Double Glass Module

Bifacial Double Glass Module (Black Pro)DAS-DH108ND440W~465W Key Features: High Efficiency Leading module efficiency in industry, up to 22.8% Excellent Appearance and Performance Bifacial ...



DAS Black Pro 440W Bifacial All Black Double Glass N-Type DAS ...

Description All-black aesthetic meets top-tier N-Type efficiency in this 440W bifacial double-glass module by DAS. Ideal for high-end residential and commercial PV systems. Key Features: 440W N ...

DAS-Solar-D-Matrix

Excellent product appearance and performance Two-sided double-glazed modules, symmetrical structural design, low risk of hidden cracks.



Contact Us

For catalog requests, pricing, or partnerships, please visit:
<https://www.scelto.co.za>

